



Performance Curves


Crankshaft torque

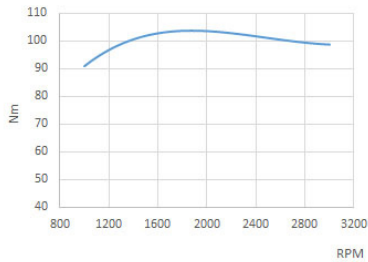

Power (ISO 3046/1)

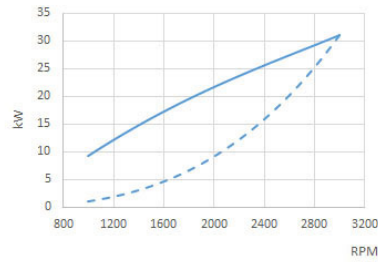

Fuel Consumption

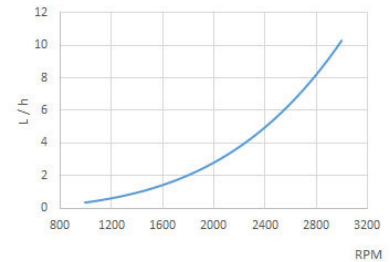

Engine Power

Propeller Power

Panels

SVT 20 Standard



Tachometer including hour meter

Coolant Temperature Gauge

Pre-heating Pilot Light

Low Battery Alarm

High Temperature Alarm

Low Oil Pressure Alarm

5 Positions Key

Dimensions: 205 x 155 mm



SVT 30 Optional

Tachometer including hour meter

Coolant Temperature Gauge

Pre-heating Pilot Light

Low Battery Alarm

High Temperature Alarm

Low Oil Pressure Alarm

5 Positions Key

Oil Pressure Gauge

Voltmeter

Dimensions: 255 x 160 mm

Accessories

Scope of Supply

Packaging

Instrument Panel SVT 20

Extension Harness 3 m

Silentblocks

Sump Drain pump

Owner's Manual

Optional Equipment & Kits

We have a wide range of available accessories and kits.

Our technical department will calculate the propeller to optimize your engine

For additional information access our website

Transmissionsalternativ

Model	Type	Down Angle	Reduction Ratio (Light Duty)	Reduction Ratio (Cont. Duty)	Engine Weight with Gearbox
SP60	Sail Drive	0°	2.14:1	-	220 Kg (485 Lbs)
TM-345	Hydraulic	0°	2.00:1 - 2.47:1	2.00:1 - 2.47:1	205 Kg (452 Lbs)
TM-345A	Hydraulic	8°	2.47:1 - 2.00:1	2.47:1 - 2.00:1	205 Kg (452 Lbs)
TM-93	Hydraulic	0°	2.09:1 - 1.51:1 - 2.77:1 - 2.40:1	2.09:1 - 1.51:1 - 2.77:1 - 2.40:1	236 Kg (520 Lbs)
TMC-260	Mechanical	0°	2.47:1	2.47:1	195 Kg (430 Lbs)
TMC-60A	Mechanical	7°	2:1 - 2.45:1	-	188 Kg (414 Lbs)
TMC-60P	Mechanical	0°	2.45:1 - 2:1 - 1.55:1 - 2.83:1	-	188 Kg (414 Lbs)
ZF 15 MIV	V-Drive M.	15°	2.134:1	2.134:1	194 Kg (428 Lbs)

Authorized Dealer



solediesel.com - info@solediesel.com

Detailed drawings, brochures and manuals are available on the web. © 2017, Solé Diesel. All rights reserved. Technical specifications, data and presentation are subjected to variations, changes and updates without prior notice, and without any obligation or liability whatsoever. Text and illustrations are not binding.

